

► Advantages


- High Accuracy and Stability
- Fast Calibration
- Easy to Carry
- Intuitive Operation
- Two Year Warranty
- [Free Calibration Software](#)
- Innovative Patented Technology
- [Dynamic Load Compensation](#)
- [Accredited Certificates](#) (Optional)
- Plug & Play Reference Sensors
- [Application Specific Inserts](#)
- High Profile Design

Temperature Range	Int. °C	Ext. °C	Accuracy		Stability	Resolution	Type	Insert Diameter	Immersion Depth	Functions								Model
			°C	°C						External Ref. Sensor	Sensor Under Test Input*	Dynamic Load Compensation	Clamp Calibration	Set Follows True	Autostep	Switch Test	Patented Technology	
-100°C to 155°C	0.30	0.06	0.030	0.001	Dry	29.7	190	✓	✓	✓	✓	✓	✓	✓	✓	X, Y	RTC-159	
-90°C to 125°C	0.30	0.07	0.030	0.010	Dry	30.0	190	✓	✓		✓	✓	✓	✓		X	PTC-125	
-45°C to 155°C	0.10	0.04	0.005	0.001	Dry	29.7	160	✓	✓	✓	✓	✓	✓	✓	✓	Y	RTC-157	
-30°C to 155°C	0.10	0.04	0.005	0.001	Dry	29.7	160	✓	✓	✓	✓	✓	✓	✓	✓	Y	RTC-156	
-25°C to 155°C	0.18	0.06	0.010	0.010	Dry	25.6	160	✓	✓		✓	✓	✓	✓			PTC-155	
-23°C to 155°C	0.18	-	0.010	0.100	Dry	19.9	160					✓	✓	✓			ITC-155	
-22°C to 155°C	0.18	0.04	0.010	0.001	Dry/Wet	63.5	180	✓	✓	✓	✓	✓	✓	✓	✓	Y	RTC-158	
-17°C to 140°C	0.40	-	0.050	0.100	Dry	19.1	115					✓	✓	✓			CTC-140	
-10°C to 125°C	0.50	-	0.050	0.100	Dry	12.5	110					✓	✓	✓			ETC-125	

Temperature Range	Int. °C	Ext. °C	Accuracy		Stability	Resolution	Type	Insert Diameter	Immersion Depth	Functions								Model
			°C	°C						External Ref. Sensor	Sensor Under Test Input*	Dynamic Load Compensation	Set Follows True	Autostep	Switch Test	Mains Variance Immunity	Patented Technology	
28°C to 250°C	0.28	0.07	0.020	0.001	Dry/Wet	63.5	180	✓	✓	✓	✓	✓	✓	✓	✓	Y	RTC-250	
33°C to 320°C	0.25	-	0.020	0.100	Dry	29.7	150				✓	✓	✓	✓			ITC-320	
33°C to 320°C	0.50	-	0.100	0.100	Dry	25.7	110				✓	✓	✓	✓			CTC-320A	
33°C to 320°C	0.50	-	0.100	0.100	Dry	25.7	190				✓	✓	✓	✓			CTC-320B	
33°C to 350°C	0.20	0.08	0.020	0.010	Dry	25.6	140	✓	✓	✓	✓	✓	✓	✓	Z		PTC-350	
28°C to 400°C	0.50	-	0.150	0.100	Dry	Fixed	105				✓						ETC-400	
28°C INFRARED to 400°C	0.50	-	0.300	0.100	Dry	35.0	-				✓						ETC-400R	
33°C to 650°C	0.45	-	0.040	0.100	Dry	29.7	150				✓	✓	✓	✓			ITC-650	
33°C to 650°C	0.90	-	0.100	0.100	Dry	25.7	110				✓	✓	✓	✓			CTC-650A	
33°C to 650°C	0.60	-	0.050	0.100	Dry	25.7	190				✓	✓	✓	✓			CTC-650B	
33°C to 660°C	0.30	0.15	0.040	0.010	Dry	24.6	150	✓	✓	✓	✓	✓	✓	✓	Z		PTC-660	
33°C to 700°C	0.29	0.11	0.020	0.001	Dry	30.0	200	✓	✓	✓	✓	✓	✓	✓	Y, Z		RTC-700	
300°C to 1205°C	2.00	-	0.100	0.100	Dry	25.0	135				✓	✓	✓	✓			CTC-1200	

Dynamic Load Compensation

DLC function makes the homogeneity independent of the different loads of the insert. The DLC sensor improves the homogeneity even more by controlling the homogeneity not only in the well, but also inside the insert, where the sensors-under-test are placed during calibration.

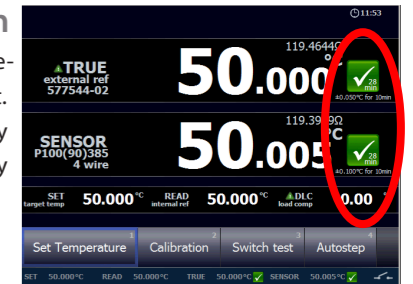

Free calibration software

JOFACAL is our highly versatile calibration software that is supplied with the calibrator. The software ensures easy calibration of various temperature sensors, such as RTD's, thermocouples, transmitters and thermo switches. It integrates with all our calibration instruments.

Clamp Sensor Calibration

Most of the temperature sensors used for measurement within the food industry have to be approved for sanitary applications. Therefore, the temperature sensors have been designed in such a way that only a minimal number of germs or contaminants can conceal themselves on the sensors. Unfortunately, a side effect of these designs is that the sensors cannot be calibrated in a standard calibrator. The RTC-156 overcomes that problem by using a special designed clamp insert together with our short and flexible STS-102 reference sensor.



MVI - Mains Variance Immunity

The cycling of supply power can cause the temperature regulator to perform inconsistently, leading to both inaccurate readings and unstable temperatures. Our MVI system eliminates errors from unstable mains power.

Patented Technology

- X)** The cooling/heating technology used in our ultra coolers makes it possible to cover a very broad temperature range from -100 to 155°C.
- Y)** The DLC technology increases the temperature homogeneity and documents it in the display.
- Z)** The cooling speed of our heater calibrators for the RTC and PTC Series, is improved by using a special insulation.

* RTD, TC, mA active, mA passive and switch