

**KSR Control Units**  
**KSR Set Point Relays**  
**KSR Contact Protection Relays**



1011-2





**KSR KUEBLER Niveau-Messtechnik AG**



69439 Zwingenberg  
Germany  
Tel ++49 (0) 62 63 - 87- 0  
Fax ++49 (0) 62 63 - 87 99

info@ksr-kuebler.com  
www.ksr-kuebler.com

**KUBLER FRANCE S.A.**  
68700 Cernay



**KSR KUEBLER (UK)**  
Level Measurement & Control Ltd.  
Molesey, Surrey KT8 1QZ

**KSR KUEBLER (SCANDINAVIA)**  
2970 Hørsholm

**KSR KUEBLER (ITALY)**  
Misura di Livello  
24030 Brembate S.(BG)

**KSR KUEBLER (USA)**  
Level Control Products of America Inc.  
Charlotte, NC 28273

**KSR KUEBLER (SINGAPORE)**  
Level Measurement & Control Pte. Ltd.  
Singapore 608609

**SHANGHAI KSR KUEBLER**  
Automation Instruments Co. Ltd.  
Shanghai / China

## Approvals



### Germany

Physikalisch Technische  
Bundesanstalt PTB

Germanischer Lloyd



### UK

British Approvals Service for  
Electrical Equipment in Flammable  
Atmospheres



### France

Laboratoire Central des Industries  
Electriques



### Denmark








DEMKO




### Russia

Gosgortekhnadzor  
OGS Oil & Gas Safety


## Contents

Compass	4 / 5
KSR Control Unit MF 24-...	6 / 7
 KSR Control Unit KFD2-PT2-Ex1-..	6 / 7
KSR Set Point Relay GW 24	8 / 9
KSR Control Unit MD-...	10 / 11
KSR Control Unit Tracker....	12 / 13
KSR Head-mounted Transmitter XT 42	14 / 15
 KSR Head-mounted Transmitter XT 42 SI	14 / 15
 KSR Head-mounted Transmitter 5343 B	16 / 17
 KSR Head-mounted Transmitter 5335 B	16 / 17
 KSR Current repeater KFD2-..	18
KSR Power Supply SG-...	19
 KSR Contact Protection Relay KR230-Ex	20 / 21
 KSR Contact Protection Relay KR24-Ex	20 / 21
KSR Contact Protection Relay KR230	22 / 23
KSR Contact Protection Relay KR24	22 / 23

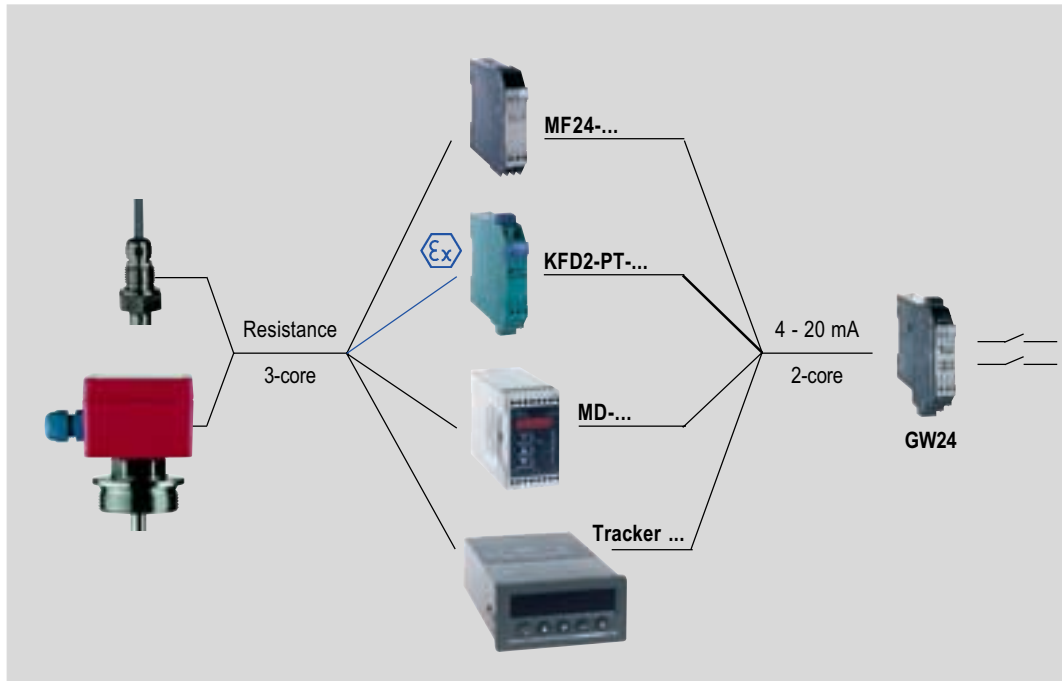


Type	MF24-... page 6 / 7	KFD2-PT-... page 6 / 7	MD-... page 10 / 11	Tracker ... page 12 / 13
Mounting	DIN-rail in cabinet			panel
Power supply	24 V DC		24 V DC 24 / 115 / 230 V AC	10 V ... 32 V AC / DC 90 V ... 265 V AC
Input	1 kOhm ... 250 kOhm Potentiometer		1 kOhm ... 100 kOhm Potentiometer	400 Ohm ... 100 kOhm Potentiometer
Output	0 mA ... 20 mA / 4 mA ... 20 mA 0 V ... 10 V / 2 V ... 10 V			
Temperature	-20°C ... +60°C		-30°C ... +70°C	+10°C ... +50°C
Ex Approval			EEx ia IIC	
Dimensions	20 x 92.5 x 115 mm		45 x 75 x 110 mm	96 x 48 x 172 mm
Features			LED-display 2 switch points	LED-display programmable 2 switch points (optional)

1011-2

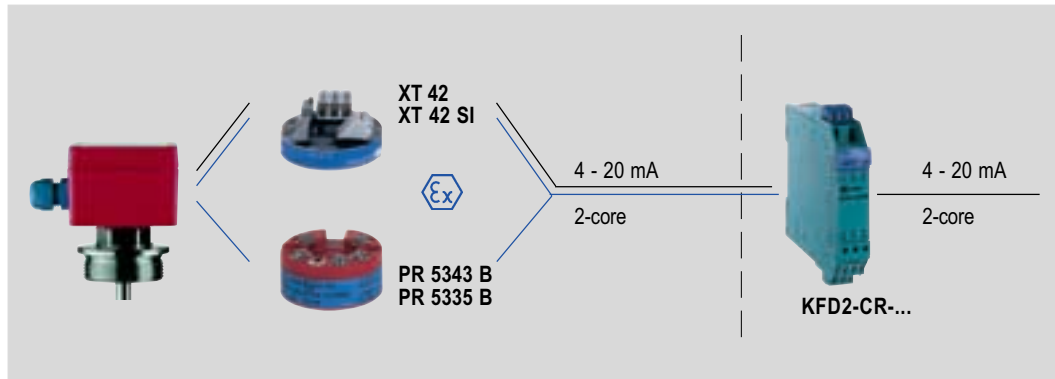

Type	XT 42 page 14 / 15	XT 42 SI page 14 / 15	PR 5343 B page 16 / 17	PR 5335 B page 16 / 17
Mounting	Head-mounted			
Power supply	11 V ... 30 V DC		8 V ... 35 V DC 8 V ... 28 V AC (Ex)	
Input	1 kOhm ... 100 kOhm Potentiometer		0 kOhm ... 100 kOhm Potentiometer	0 kOhm ... 7 kOhm Potentiometer
Output	4 mA ... 20 mA			
Temperature	-20°C ... +60°C	T6 max. 80°C T5 max. 95°C T4 max. 130°C	T6 max. 60°C T4 max. 85°C	
Ex Approval	EEx ia IIC			
Dimensions	OD 44 x 20 mm			
Features			programmable	programmable HART®

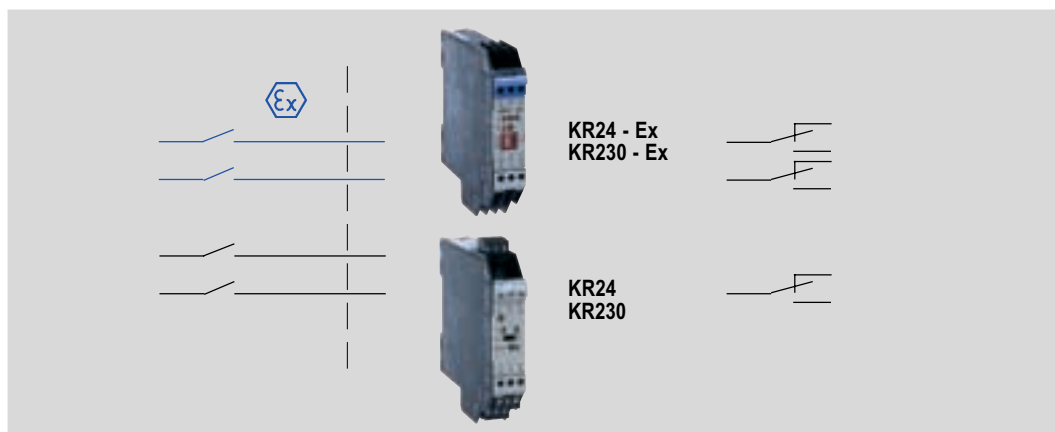

Type	KR24 page 22 / 23	KR24 - Ex page 20 / 21	KR230 page 22 / 23	KR230 - Ex page 20 / 21
Mounting	DIN-rail in cabinet			
Power supply	24 V DC		230 V AC	
Input	2 x switch contact			
Output	1 x switch contact	2 x switch contact	1 x switch contact	2 x switch contact
Temperature	-25°C ... +65°C	-20°C ... +60°C	-25°C ... +65°C	-20°C ... +60°C
Ex Approval	EEx ia IIC		EEx ia IIC	
Dimensions	20 x 92.5 x 115 mm			

# KSR Control Unit Type MF24-... and Type KFD2-PT2-Ex1-.



### General Description

The control units MF24... and KFD2... convert a resistance input into a proportional analogue output.

The input is certified intrinsically safe EEx ia IIC.

The output circuit is not intrinsically safe.

### Application

Input, output and power supply are galvanically isolated from each other.

The input is suitable for a 3-wire potentiometer circuit with a total resistance of 1kOhm ... 250 kOhm.

It is especially for use with KSR level sensors.

The input resistance is converted into a proportional current or voltage output.

The required output signal has to be specified at the time of order.

This output signal can be used for displays, set point relays (e.g. GW24) or PLCs.

### Attention!

**Range and Zero** are not adjustable

The measuring range of the level sensor (0% and 100% position) have to be specified by customer.

### Advantages

- Type MF24-...**
- compact housing
  - easy installation
  - high accuracy (0.05 %)
  - EMC-compatible

- Type KFD2-PT2-Ex1-... additionally**
- Input EEx ia IIC

### Order Information


Order Information	MF24-020	MF24-420	MF24-010	MF24-210	KFD2-PT2-Ex1-4	KFD2-PT2-Ex1-5	KFD2-PT2-Ex1-0	KFD2-PT2-Ex1-2
					0...20 mA	4...20 mA	0...10 V	2...10 V
					0...20 mA	4...20 mA	0...10 V	2...10 V



The control unit is only available for 24V DC supply voltage.


In connection with KSR power supply type SG... other supply sources are possible.

### MF24-...

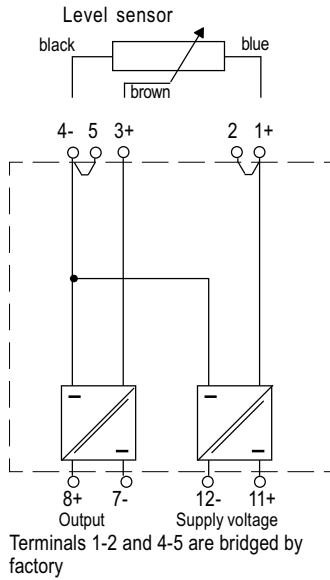


### Current output

Level display with control unit




Control unit with set point relay




### Voltage output


Level display with control unit



Control unit with set point relay




### KFD2-PT2-Ex1-.

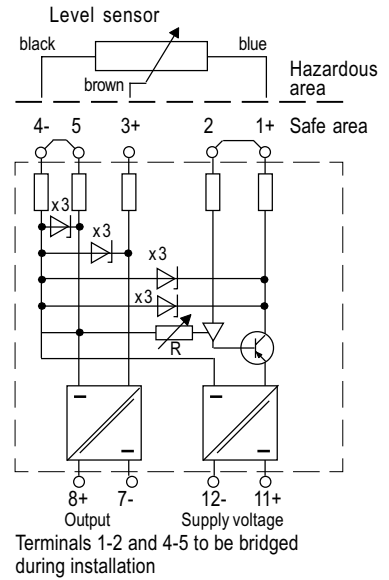


### Current output

Level display with control unit




Return of the signal into hazardous area




### Voltage output

Level display with control unit



Return of the signal into hazardous area




# KSR Control Unit

## Type MF 24-... / KFD 2-PT 2-Ex 1-.



		Type MF24-...	Type KFD2-PT2-Ex1-.	Technical Data
<b>Power supply</b>	Supply voltage	terminal 11 (L+), 12 (L-)	or Power Rail	
	Ripple	20 V ... 35 V DC		
	Power consumption	within supply tolerance		
		approx. 0.6 W for voltage output		
		approx. 1.3 W for current output		
<b>Input</b>	Total resistance value	1 kOhm ... 250 kOhm		
	Measurement voltage	approx. 4.7 V measured across terminals 1 and 4		
<b>Rating acc. to Certificate of conformity</b>			<b>BAS00ATEX7171X</b>	
	max. voltage U <sub>o</sub>		10.4 V DC	
	max. current I <sub>o</sub>		31.4 mA	
	max. power P <sub>o</sub>		82 mW	
<b>Permissible circuit values, Ignition protection class, category</b>			<b>EEx ia</b>	
	Explosion group		IIA	IIB
	external capacitance		79 µF	17.4 µF
	external inductance		273 mH	132 mH
<b>Output</b>	terminal 7-, 8+	<b>Range and Zero</b> not adjustable		
	Output options	0 mA ... 20 mA, 4 mA ... 20 mA, 0V ... 10 V, 2 V ... 10 V		
	Load resistance (current)	≤ 1000 Ohm		
	Output resistance (voltage)	≤ 30 Ohm		
<b>Transfer characteristics</b>				
	Non-linearity	≤ ±5 mV for voltage output		
		≤ ±10 µA for current output		
	Temperature drift	≤ 0.5 mV / °C for voltage output		
		≤ 1 µA / °C for current output		
	Settling time to 1 % of span	≤ 25 ms (10 to 90% step)		
	Rise time for 10 % / 90 % step	≤ 8 ms		
	Bandwidth	DC to 100 Hz (-3 dB)		
	Interference rejection	additional error when tested acc. to IEC 801-6 level 2		
		< 10 mV typical from 100 kHz ... 500 MHz		
<b>Galvanic separation</b>				
	Input - Output	yes		
	Input - Supply / Output - Supply	yes		
<b>Environmental conditions</b>				
	Operating temperature	-20°C ... +60°C		
	Protection class	IP 20		
<b>Mechanical data</b>				
	Design	modular terminal housing in Makrolon		
		flammability class to class to UL94: V - 0		
	Mounting	clipping onto 35 mm standard rail or by screws		
	Connections	self-opening instrument terminals max. 2.5 mm"		
	Weight	approx. 120 g		

**Attention!** Use shielded measurement circuit only (EMC)

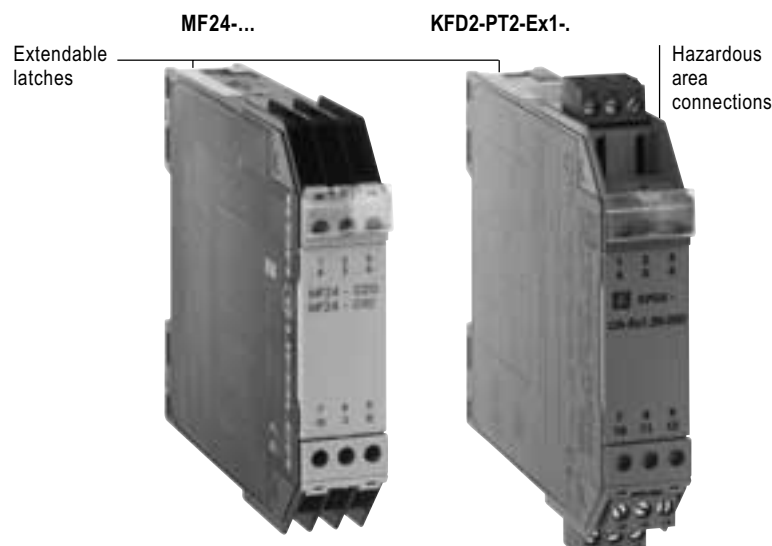

### Dimensions

#### MF24-...

W 20 mm  
H 90 / 92.5 mm  
D 115 mm

#### KFD2-PT2-Ex1-.

W 20 mm  
H 90 / 107 mm  
D 115 mm

1011-2

# KSR Set Point Relay Type GW24



**General Description** The set point relay monitoring trip limits in measurements using current/voltage signals. These signals can be generated by control units e.g. MF... or KFD2... .

**Application** The set point relay GW24 converts the current/voltage signals at the input (terminals 1, 2, 3) to a proportional internal voltage.

A comparator compares this internal voltage with two preset values. The hysteresis, the operating mode and the type of alarm (HIGH/LOW) are selectable for each set point.

The set point relay can be configured using DIP switches and potentiometers.

During configuration (switch points, hysteresis), a monitor voltage 0...10 V can be used which is available via a 2 mm test socket. This enables you to change the configuration during normal operation or even without any input signal.

**Options** The KSR set point relay has the following features:

- 2 independent switch points with 2 output relays or switch point 1 triggering both relays (DIP switch S1.6 in position ON)
- Test socket for set points and measured value
- HIGH or LOW alarm selectable for each set point
- Relay mode of operation separately selectable
- Wire break monitoring facility can be disabled and directly affects the output relay status
- Hysteresis adjustable from 0% to 60% for each set point
- EMC acc. to NAMUR NE 21


**Order Information** **GW 24**

The set point relay is only available for 24 V DC power supply.

Operation at mains voltage is possible in conjunction with a power supply unit SG... (see page 19).

**Attention!**

If a set point relay is used with a control unit type MF24 or KFD2..., both devices should operate on the same type of signal.

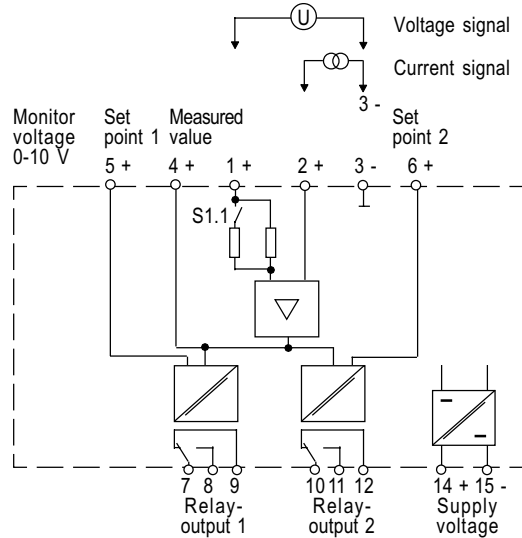

**Front panel controls**

**LEDs**



- LED 1 yellow Switching status Relay 1
- LED 2 yellow Switching status Relay 2
- LED 3 green Supply voltage

**Switches**

- S 1 Alarm setting

**Potentiometer**

- T 1 Set point 1
- T 2 Set point 2
- ∩1 Hysteresis set point 1
- ∩2 Hysteresis set point 2

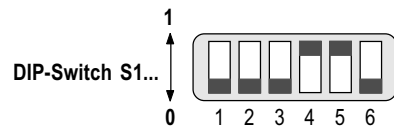

- S1.1** Pos. "0" 0/2...10V input signal  
Pos. "1" 0/1...5V input signal
- S1.2** Setting HIGH/LOW alarm (Alarm 1)  
Pos. "0" HIGH alarm relay 1  
Pos. "1" LOW alarm relay 1
- S1.3** Setting HIGH/LOW alarm (Alarm 2)  
Pos. "0" HIGH alarm relay 2  
Pos. "1" LOW alarm relay 2
- S1.4** Condition of relay 1  
Pos. "0" Relay de-energised (Alarm 1)  
Pos. "1" Relay energised (Alarm 1)
- S1.5** Condition of relay 2  
Pos. "0" Relay de-energised (Alarm 2)  
Pos. "1" Relay energised (Alarm 2)
- S1.6** Pos. "0" Relay 1 independent of relay 2  
Pos. "1" Set point 1 triggers both relays

Extendable latches



**Dimensions**

- W 20 mm
- H 107 mm
- D 115 mm



# KSR Set Point Relay Type GW24



## Type GW 24

Technical Data

<b>Power supply</b>		terminal 14(+), 15(-)	20 V ... 30 V DC approx. 2.25 W (typ. 1.68 W)
<b>Input</b>	Supply voltage		
	Power consumption		
	Current	terminal 2(+), 3(-)	0 mA ... 20 mA, 4 mA ... 20 mA
	Input resistance		50 Ohm
<b>Output</b>	Voltage	terminal 1(+), 3(-)	0 V ... 10 V, 2 V ... 10 V
	Input resistance		100 kOhm
<b>Set point 1</b>	Relay output	terminal 7, 8, 9	7 (common), 8 (NO), 9 (NC)
<b>Set point 2</b>	Relay output	terminal 10, 11, 12	10 (common), 11 (NO), 12 (NC)
	Contact rating	AC	$U \leq 250 \text{ V}$ , $I \leq 5 \text{ A}$ , $P \leq 1250 \text{ VA}$
	Contact rating	DC	$U \leq 125 \text{ V}$ , $I \leq 5 \text{ A}$ , $P \leq 150 \text{ W}$
<b>Transfer characteristics</b>			
	Deviation		$\leq 0.5\%$
	Temperature		0.01%/K of set value
	Input delay		100ms
<b>Galvanic separation</b>			
	Input - Output		safe isolation acc. to DIN VDE 0106 nominal isolation voltage 253 V <sub>eff</sub>
	Input - Supply		functional isolation acc. to DIN EN 50178 nominal isolation voltage 50 V <sub>eff</sub>
	Output - Supply		safe isolation acc. to DIN VDE 0106 nominal isolation voltage 253 V <sub>eff</sub>
<b>Applied standards</b>			
	Galvanic separation		acc. to DIN EN 50178
	Environmental conditions		acc. to DIN IEC 721
	EMC compatibility		acc. to EN 50081-2/EN 50082-2, NAMUR NE 21
<b>Environmental conditions</b>			
	Operating temperature		-20°C ... +60°C
	Protection class		IP 20
<b>Mechanical data</b>			
	Design		Modular terminal housing in Makrolon flammability class to UL94: V - 0
	Mounting		clipping onto 35 mm standard rail or by screws
	Connections		self-opening instrument terminals max. 2.5 mm <sup>2</sup>
	Weight		approx. 120 g

1011-2

### Configuration

1. Connect voltmeter to terminals 5+, 3- (monitor voltage for set point 1) or to terminals 6+, 3- (monitor voltage for set point 2). 10V refer to 100%, 0V/2V refer to 0% of input range.

2. Adjust set point 1 with potentiometer T1 and set point 2 with T2.

3. Formula

$$\frac{8 \dots 20 \text{ mA}, 1 \dots 5 \text{ V}, 2 \dots 10 \text{ V}}{8/100 \times (\text{set point in } \%) + 2} = \text{monitor voltage}$$

4. Adjust hysteresis of set point 1 with potentiometer **P1** and potentiometer **P2** for set point 2 respectively.

### Example 1

**For input signals 0...20 mA, 0...5 V, 0...10 V:**

A monitor voltage of 10 V refers to 100% of the input range.

A monitor voltage of 0 V refers to 0% of the input range.

**Input signal 0...5 V - Set point 50% (2.5 V)**

A monitor voltage of 5 V refers to 50% of the input range.

Thus the voltage between terminals 5+, 3- or 6+, 3- has to be set to 5 V.

### Example 2

**For input signals 4...20 mA, 1...5 V, 2...10 V:**

A monitor voltage of 10 V refers to 100% of the input range.

A monitor voltage of 2 V refers to 0% of the input range.

**8/100 x (set point in %) + 2 = monitor voltage**

**Input signal 4...20 mA - Set point 50% (12 mA)**

$8 / 100 \times 50 + 2 = 6 \text{ V}$  (monitor voltage)

A monitor voltage of 6 V refers to 50% of the input range.

Thus the voltage between terminals 5+, 3- or 6+, 3- has to be set to 5 V.

# KSR Control Units Type MD-..




**General Description** The control unit MD-... converts a resistance input into a proportional analogue output.  
Input, output and power supply are galvanically isolated.

**Application** The input is suitable for a 3-wire potentiometer circuit with a resistance of 1k ... 100k.  
The control unit MD-... is especially suited for use with KSR level sensors.  
The input resistance is converted to a proportional current or voltage output. The required output signal has to be specified at the time of order. This output signal can be used for displays, set point relays (e.g. GW24-...) or PLCs.  
2 built-in set point relays can be programmed for NC or NO output.  
As an additional feature the MD-... has a 4 digit LED display that can be programmed to show any number in the range of -999 ... 9999.

- Advantages**
- compact housing
  - easy installation
  - high accuracy (0.05 %)
  - EMC-compatible

<b>Order Information</b>	<b>MD230-A</b>	Supply voltage
	<b>MD115-A</b>	230 V AC
	<b>MD24-A</b>	115 V AC
	<b>MD24-D</b>	24 V AC

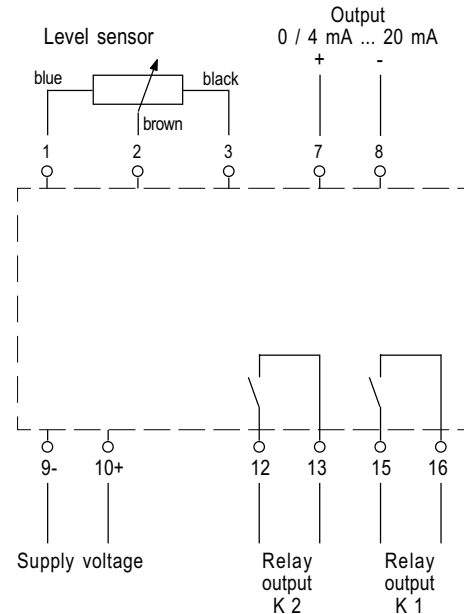

1011-2

**Dimensions**  
W 45 mm  
H 75 mm  
D 100 mm



# KSR Control Units

## Type MD-..



### Type MD... ..

### Technical Data

<b>Power supply</b>			
Supply voltage	terminal 9(L), 10(N)	optional 24 / 115 / 230 V AC, 48 ... 62 Hz	
Supply voltage	terminal 9(L+), 10(L-)	24 V DC	
Power consumption		approx. 4 VA	
<b>Input</b>			
Total resistance value	terminal 1, 3, 5	1 kOhm ... 100 kOhm	
<b>Analogue output</b>			
Output options	terminal 7(+), 8(-)	0 mA ... 20 mA, 4 mA ... 20 mA	
Output current		≤ 400 Ohm	
Load resistance		0 V ... 10 V, 2 V ... 10 V	
Output voltage		≤ 500 Ohm	
Output resistance			
<b>Relay output</b>			
<b>Relay K1</b>	terminal 15, 16	1 NC or 1 NO, programmable	
<b>Relay K2</b>	terminal 12, 13	1 NC or 1 NO, programmable	
Hysteresis		programmable	
Contact rating AC		U ≤ 250 V, I ≤ 8 A, P ≤ 500 VA	
<b>Display</b>			
		4 digit display	
		7-segment LED, digit height 7.6 mm	
		Range -999 ... 9999 programmable	
<b>Environmental conditions</b>			
Operating temperature		0°C ... +50°C	
Storage temperature		-30°C ... +70°C	
Protection class		housing IP 40	
		terminal IP 20	
<b>Mechanical data</b>			
Design		Housing ABS, flammability class to UL94 HB / 1.6	
Mounting		clipping onto 35 mm standard rail or by screws	
Weight		approx. 320 g	

**Attention!** Use shielded measurement circuit only (EMC)

# KSR Programmable Digital Display Unit Type Tracker ...



**General Description** The KSR programmable digital display unit type Tracker... combines the features of a control unit and a digital display. Analogue output and limit switches are available as options. Input, output, and supply voltage are galvanically isolated.


**Application** The input circuit is designed to accept 3-wire-potentiometer circuits with an overall resistance of 1 kOhm...100 kOhm. The KSR programmable digital display unit type Tracker... is especially for connection to KSR level sensors.

The analogue output and displayed values are programmable. Thus the device can be used to measure the contents of vessels with linear or non-linear shapes (e.g. cylindrical).

**Tracker 223 and Tracker 224** convert the resistance signal into a voltage or current signal. This signal can be used for further evaluation via a PLC.

In addition, **Tracker 222 and Tracker 224** include 2 independent programmable relay outputs.

- Advantages**
- compact size
  - weather proof housing IP65 available
  - easy installation
  - high accuracy (0.2 % for output, 0.05 % for input)
  - EMC-compatible

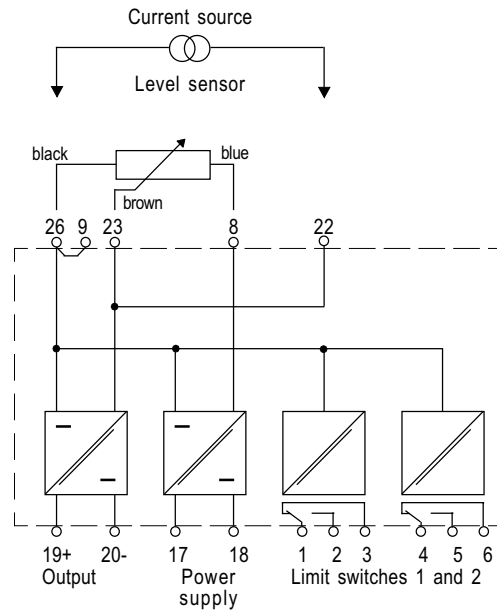

**Type code  
Order  
Information**

Tracker	...	-.- R	
		1 =	Supply voltage 90...265 V AC
		2 =	Supply voltage 10...32 V AC/DC
		221 =	Display only
		222 =	Display with limit switches
		223 =	Display and analogue output
		224 =	Display, analogue output and limit switches
Tracker = Base type			

**Dimensions**  
W 96 mm  
H 48 mm  
D 173 mm



1011-2

# KSR Programmable Digital Display Unit Type Tracker ...



## Type Tracker...

Technical Data

<b>Power supply</b>		Supply voltage terminal 17(N), 18(L)	90 V ... 265 V AC (10 V ... 32 V DC or AC optional)
		Power consumption	approx. 10 VA
<b>Input</b>		Potentiometer (overall resistance)	400 Ohm ... 100 kOhm
		Voltage	± 100 mV, ± 10 V
		Current	± 20 mA
		Resistance	0 Ohm ... 400 Ohm
<b>Output (Tracker 223 and 224 only)</b>		Output current	0 mA ... 20 mA, 4 mA ... 20 mA
		Output voltage	0 V ... 10 V, 2 V ... 10 V
		Accuracy	0.2 % of FS
		Resolution	0.05 % of FS, 5 mV or 0.01 mA
		Temperature drift	100 ppm/°C
		Sample frequency	30 Hz
		Output ripple	< 10 mV or < 50 µA
		Max. load	≤ 900 Ohm
<b>Output Relays (Tracker 222 and 224 only)</b>		Limit switch 1 terminal 1, 2, 3	programmable 1 SPDT
		Limit switch 2 terminal 4, 5, 6	1 SPDT
		Hysteresis	programmable
		Contact rating	1 A / 250 V AC
<b>Hysteresis</b>			4 digits (Tracker 221 and 222) 5 digits (Tracker 223 and 224) 7-segment LED, digit height 14 mm
<b>A/D-Converter</b>		Type	Dual slope integrating with auto zero
		Conversion rate	10 Hz
		Common Mode Rejection	> 150 dB
		Series Mode Rejection	> 70 dB
<b>Transfer characteristics</b>		Response on 63 % of FS	32 ms
		Response on 99 % of FS	100 ms
<b>Programming</b>			Display and output programmable with up to 24 values
<b>Isolation</b>			tested up to 500 V
<b>Environmental conditions</b>		Operating temperature	10°C ... +50°C
		Ingress protection	Frontpanel IP 20
<b>Mechanical data</b>		Mounting	Panel mounting, weather-proof housing IP 65 (NEMA 4x) available
		Terminals	self-opening instrument terminals max. 2.5 mm <sup>2</sup>
		Weight	approx. 400 g

**Attention!** Use shielded circuit only (EMC)

1011-2

# KSR Head-mounted Transmitter Type XT 42 and Type XT 42 SI



**General Description** The two-wire head-mounted transmitter XT 42 and XT 42 SI convert a resistance input to a proportional analogue output.

**Application** The input is suitable for a potentiometer circuit with a resistance of 1kOhm - 100 kOhm.

The two-wire head-mounted transmitter XT 42 and XT 42 SI is especially suited for use with KSR level sensors.

A 4 mA ... 20 mA output signal is generated as proportional equivalent of the measured resistance ratio.


- Advantages**
- Type XT 42**
- low installation costs
  - low space requirement in the control room
  - clear signal in the field
  - signal transmission over large distances
- Type XT 42 SI additionally**
- suitable for use in hazardous areas
  - suitable for use with KSR level sensor type NMG125 and MG




**Dimensions**  
OD 44 mm  
H 20 mm

**Connections**  
1 blue  
2 brown  
3 black

## Type XT 42 (Code = TS)

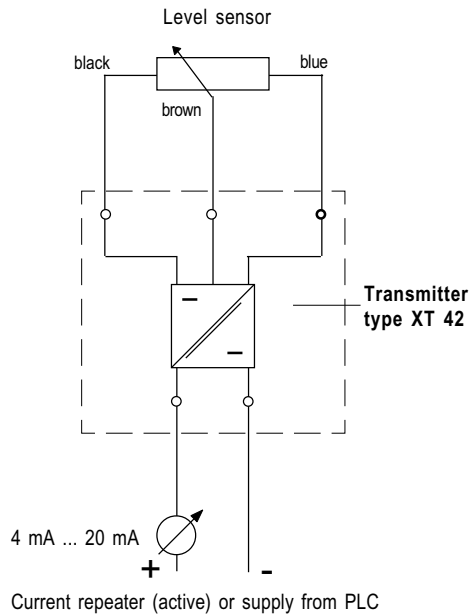

## Type XT 42 SI (Code = TE)

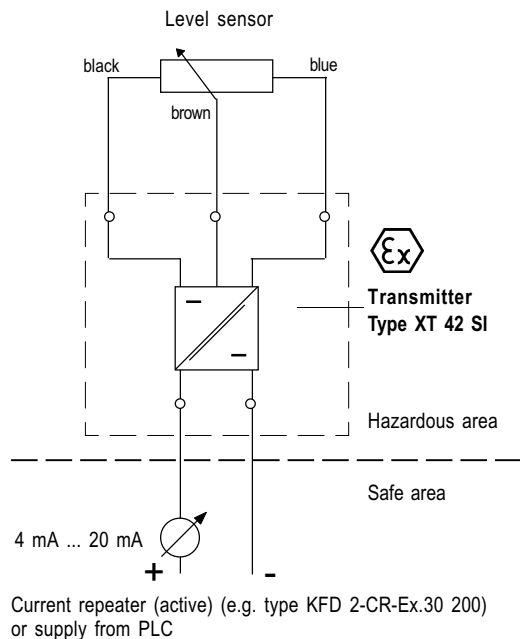

1011-2

# KSR Head-mounted Transmitter Type XT 42 and Type XT 42 SI




		Type XT 42	Type XT 42 SI	Technical Data
<b>Power supply</b>				
Supply voltage	terminal +, -	11 V ... 30 V DC		
<b>Output circuit (Supply circuit)</b>		with ignition protection class EEx ia IIC only for use in certified intrinsically safe circuits with following ratings: U <sub>o</sub> = 30 V DC		
Output signal		4 mA ... 20 mA		
Max. resistance load		1000 Ohm at U <sub>B</sub> = 30 V DC 700 Ohm at U <sub>B</sub> = 24 V DC 50 Ohm at U <sub>B</sub> = 12 V DC		
Adjustment range ZERO		± 5 %		
Adjustment range SPAN		75 % ... 100 % of total resistance		
Accuracy	0.15 %			
<b>Input circuit (Measuring circuit)</b>		3-wire potentiometer circuit		
		ignition protection class <b>EEx ia IIC T4 - T6</b>		
Measuring range		1 kOhm ... 100 kOhm of total resistance		
<b>Certificate of conformity</b>		II 1G EEx ia IIC T4 - T6 LCIE 02 ATEX 6073 X LCIE 02 ATEX 0002 U		
<b>Environmental conditions</b>				
Ambient temperature		-20°C ... +60°C	T6 max. 80°C T5 max. 95°C T4 max. 130°C	
Protection class		IP 20		
<b>Mechanical data</b>				
Design		completely sealed with Epoxy resin		
Mounting		mounting in the terminal box of KSR level sensor		
Weight		approx. 40 g		

**Attention!** Use shielded circuit only (EMC)

1011-2

## Wire breakage




Error	Description	Output signal
1	Cable blue interrupted	I ≙ 20 mA
2	Cable brown interrupted	I ≙ 25 mA
3	Cable black interrupted	I ≤ 4 mA
4	Sensor not connected	I ≙ 25 mA

# KSR Head-mounted Transmitter Type 5343 B and Type 5335 B



## 5343 B (Code = TA)

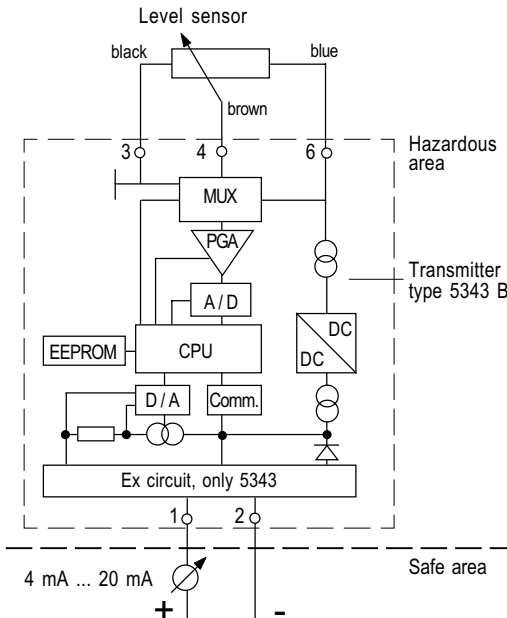

Current repeater (active) (e.g. type KFD 2-CR-Ex.30 200) or intrinsically safe supply by PLC

The two-wire head-mounted transmitter 5343 B converts a resistance input to a proportional analogue output.

By using a PC with communication interface Looplink 5905 it is possible to program any linearisation function. Thus, the transmitter is suitable to determine the contents of free tank shapes (e.g. horizontal cylinders).

The communications interface is approved for hazardous area and galvanic isolated. This protects the PC and works as a barrier between safe and hazardous area.

Communication is bi-directional, so that any data can be read and written from and to the transmitter.


### Application

The input is suitable for a potentiometer circuit with a resistance of up to 10 kOhm.

The head-mounted transmitter 5343 B is especially suited for use with KSR level sensors.



## 5335 B (Code = TD)

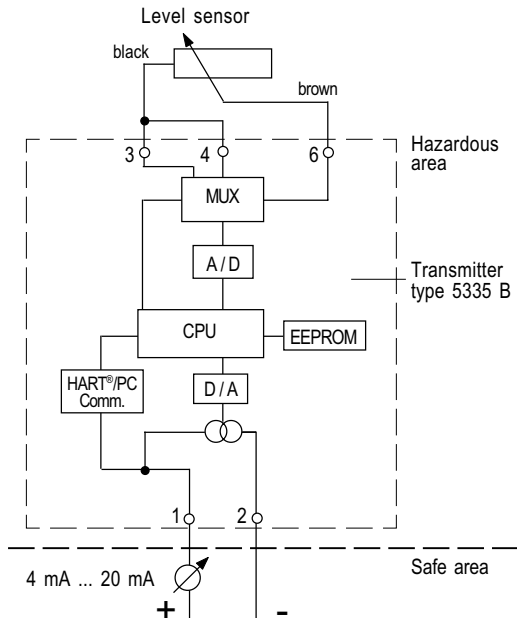

Current repeater (active) (e.g. type KFD 2-CR-Ex.30 200) or intrinsically safe supply by PLC

The two-wire head-mounted transmitter 5335 B converts a resistance input to a proportional analogue output.

### HART®-Programming

The head-mounted transmitter 5335 B can be used in conjunction with control systems utilising HART®-communication. The transmitter can be configured, read and controlled via HART®-communication. This kind of communication uses a sinus wave superimposed onto the analogue signal. The analogue signal will not be altered by the sinus wave. Using a standard HART®-terminal together with a specific DDL, all parameters of the transmitter can be changed. In addition, the configuration program PReset can be used on a standard DOS-PC to control the configuration of the transmitter via a HART®-modem.

### Configuration with PC and Loop Link 5905 (non-HART®)

By using a PC with communication interface Looplink 5905 it is possible to program the control unit on-line, even in hazardous areas, or before commissioning.

### Application

The input is suitable for a potentiometer circuit with a resistance of up to 7 kOhm.

The head-mounted transmitter 5335 B is especially suited for use with KSR level sensors.



**Dimensions**  
OD 44 mm  
H 20 mm

1011-2



# KSR Head-mounted Transmitter Type 5343 B and Type 5335 B



**Type 5343 B**





**Type 5335 B**

Technical Data

<b>Power supply</b>		Supply voltage terminal 1(+), 2(-)	Standard 8 V ... 35V DC Hazardous area 8 V ... 28V DC
<b>Output circuit (Supply circuit)</b>		Output signal Max. resistance load	with ignition protection class EEx ia IIC only for use in certified intrinsically safe circuits with following ratings: $U_i = 28 \text{ V DC}$ , $I_i = 120 \text{ mA}$ , $P_i = 0.84 \text{ W}$ 4 mA ... 20 mA 870 Ohm at $U_B = 28 \text{ V DC}$ 695 Ohm at $U_B = 24 \text{ V DC}$ 175 Ohm at $U_B = 12 \text{ V DC}$
<b>Input circuit (Measuring circuit)</b>		Measuring range	3-wire   2-wire potentiometer circuit for hazardous area EEx ia IIC T4 / T6 0 ... 100 kOhm   0 ... 7 kOhm
<b>Certificate of conformity</b>			II 1G EEx ia IIC T4 / T6 DEMKO 99 ATEX 127088   ATEX 126965
<b>Environmental conditions</b>		Ambient temperature Protection class	T4 max. 85°C T6 max. 60°C IP 20
<b>Mechanical data</b>		Design Mounting Weight	completely sealed with Epoxy resin mounting in the terminal box of KSR level sensor approx. 50 g

**Attention! Use shielded circuit only (EMC)**

## Programming

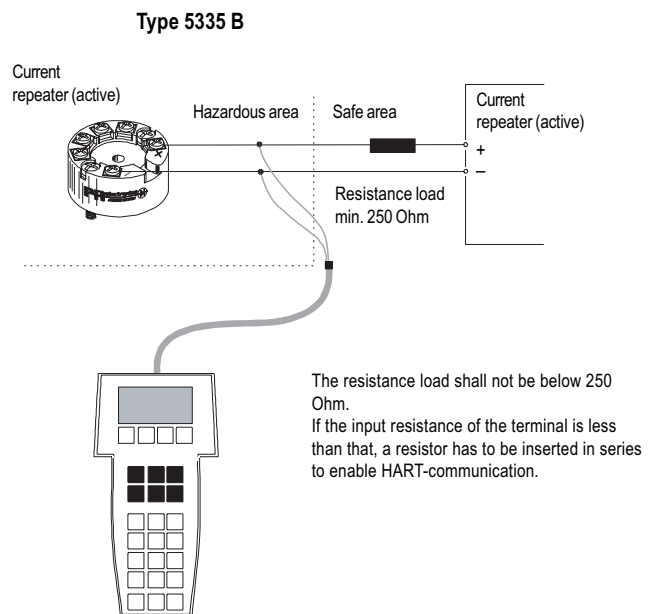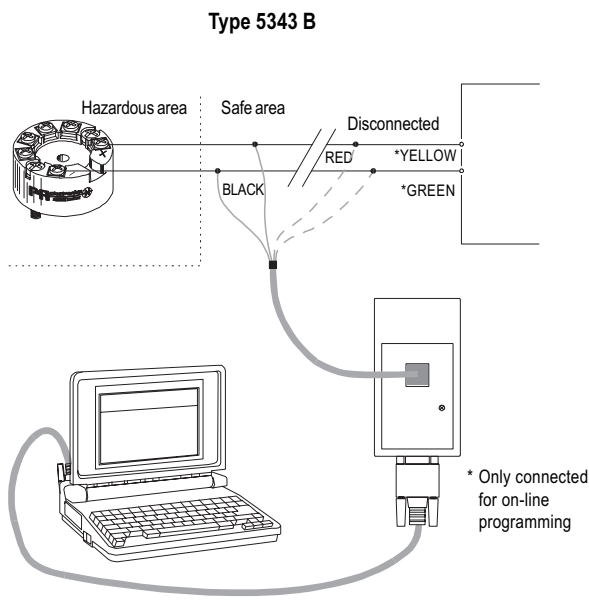

1011-2

# KSR Current Repeater (active) Type KFD2-CR-Ex1.30 200



### General Description

The current repeater (active) is used for two-wire head-mounted transmitters in intrinsically safe circuits.

It provides the transmitter with the necessary power.


Supply voltage and input are galvanically isolated from each other.

Within the supply voltage range the open-circuit voltage at terminals 1 and 3 is 25 V.

At 20 mA load voltage decreases to 17.6 V

### Technical Details

- single channel
- input EEx ia IIC
- 24 V DC supply voltage

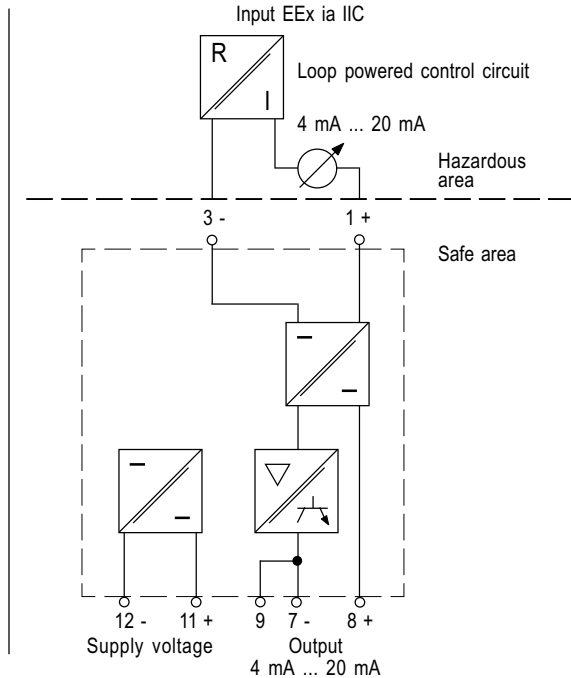

## KFD2-CR-Ex1.30 200

### Technical Data

<b>Power supply</b>	Supply voltage	terminal 11(+), 12(-)	20 V ... 35 V DC
	Ripple		within supply tolerance
	Power consumption		approx. 1.6 W
<b>Input</b>		terminal 1(+), 3(-)	intrinsically safe
	Voltage at 20 mA		17.6 V DC
<b>Ratings acc. to Certificate of conformity</b>			<b>BAS00ATEX 7164X</b>
	Max. voltage	U <sub>o</sub>	26 V DC
	Max. current	I <sub>o</sub>	93 mA
	Max. power	P <sub>o</sub>	0.6 W
<b>Permissible circuit values</b>			
	Ignition protection class, category		<b>EEx ia</b>
	Explosion group		IIA
	Max. external capacitance		2.6 µF
	Max. external inductance		36 mH
			IIB
			0.74 µF
			IIC
			0.99 µF
			4.3 mH
<b>Output</b>		terminal 7(-), 8(+)	not intrinsically safe
	Output signal		4 mA ... 20 mA
	Voltage		20 V DC
	Load resistance		≤ 1 kOhm
	Ripple		< 20 µA <sub>pp</sub>
<b>Transfer characteristics</b>			
	Calibrated accuracy at 293 K (20°C)		≤ ±10 µA incl. non-linearities and load resistance changes
	Temperature drift		≤ ±0.2 µA / K within range 273 K ... 333 K
			≤ 1 µA within range 253 K ... 273 K
	Rise time		≤ 50 µs; load resistance = 250 Ohm
<b>Galvanic separation</b>			
	Input - Output / Input - Supply		acc. to DIN EN 50020
	Output - Supply		yes
<b>Environmental conditions</b>			
	Operating temperature		-20°C ... +60°C
	Protection class		IP 20
<b>Mechanical data</b>			
	Design		Modular terminal housing in Makrolon
			flammability class to UL94: V - 0
	Mounting		clipping onto 35 mm standard rail or by screws
	Connections		self-opening instrument terminals max. 2.5 mm <sup>2</sup>
	Weight		approx. 100 g

# KSR Power Supply Type SG...



**General Description** KSR power supplies type SG... operate within the range of 100 V ... 130 V AC or 200 V ... 260 V AC respectively.


The output generates a stabilised voltage of 26 V DC.

The output voltage is fully regulated and will remain within the specified tolerance for any permissible combination of supply voltage and load current.

The unit can be used to supply KSR control units type MF24... and type KFD2-PT-Ex1- as well as set point relays type GW24.


**Output current** 600 mA at 20 °C (15.6 W)  
450 mA at 50 °C (11.7 W)

**Order Information** SG230 Supply voltage 230 V AC  
SG115 115 V AC

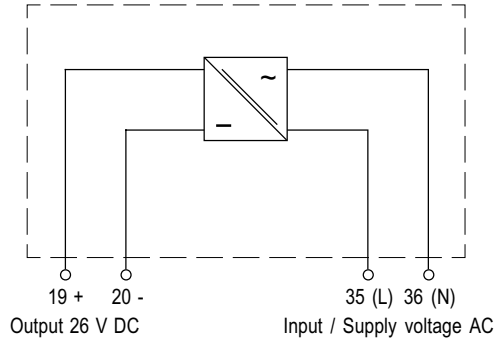

		Type SG115	Type SG230
Technical Data	<b>Power supply</b>		
	Supply voltage	terminal 35(L), 36(N) 100 V .... 130 V AC	200 V .... 260 V AC
	Frequency range	47 Hz .... 66 Hz	47 Hz .... 66 Hz
	Input fuse rating	1 A	0.5 A
	<b>Output</b>	terminal 19(+), 20(-)	
	Voltage	26 V ± 200 mV, W <sub>PP</sub> < 1 %	
	Current	600 mA (15.6 W) at 20°C, linear descent to 450 mA (11.7 W) at 50°C	
	Output fuse rating	1 A	
	<b>Environmental conditions</b>		
	Operating temperature	-20°C ... +60°C	
	Protection class	IP 20	
	<b>Mechanical data</b>		
	Design	Modular terminal housing in Makrolon flammability class to UL94: V - 0	
	Mounting	clipping onto 35 mm standard rail or by screws	
	Connections	self-opening instrument terminals max. 2.5 mm <sup>2</sup>	
	Weight	approx. 770 g	

1011-2

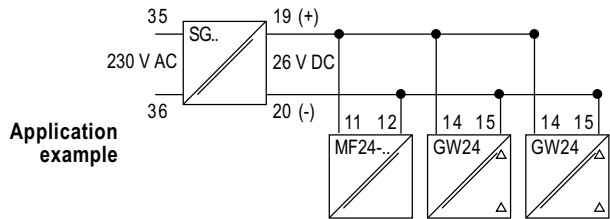

**To avoid overloading the KSR power supply type SG... the power consumption of individual control units and set point relays should be taken into account when several of these units are connected to a single power supply:**

MF24-020 and KFD2-PT2-Ex1-4	: 1.3 W
MF24-420 and KFD2-PT2-Ex1-5	: 1.3 W
MF24-010 and KFD2-PT2-Ex1-0	: 0.6 W
MF24-210 and KFD2-PT2-Ex1-2	: 0.6 W
GW24	: 2.25 W

# KSR Contact Protection Relay Type KR230-Ex and KR24-Ex



### General Description

The contact protection relays KR230-Ex and KR24-Ex transmit binary signals out of the hazardous area.

The input circuits are suitable for sensors according to NAMUR DIN EN 60947-5-6 or mechanical contacts.

Inputs are safely separated from outputs and supply voltage according to DIN EN 50020.

Outputs, and supply voltage are galvanically isolated from each other in accordance with DIN EN 50178 for a nominal isolation voltage of 253 V AC.

### Wire break monitoring

The output is switched off if the current in the control circuit falls below 0.1 mA (response level for wire break monitoring).

### Technical Details

- dual channel
- 1 output relay per channel, volt-free
- switching status indication via yellow LED
- reversible operation mode
- wire break monitoring via red LED
- control circuit EEx ia IIC

### Input Circuit

#### Option 1


Sensor connected with wire break monitoring  
DIP switch 3 in pos. " I " (OFF)

#### Option 2

Mechanical contact connected with wire break monitoring  
DIP switch 3 in pos. " I " (OFF)

#### Option 3

Mechanical contact connected without wire break monitoring  
DIP switch 3 in pos. " II " (ON)

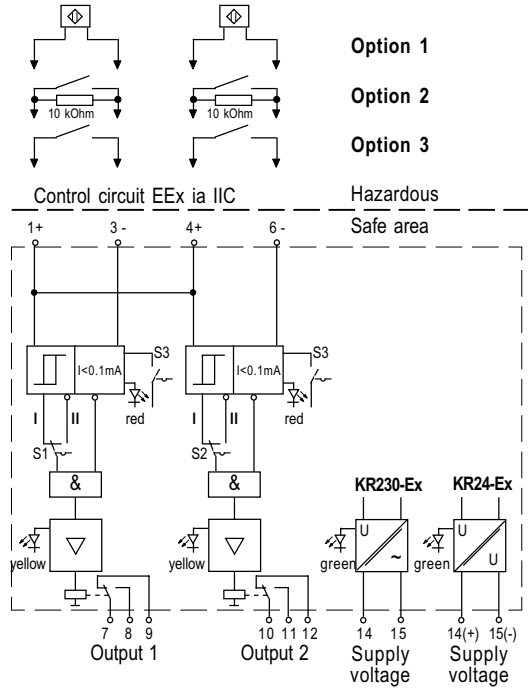

### Selection of operating mode

Detail front panel	Input	Output
	1 - Signal	Relay energised
	0 - Signal	Relay de-energised
	0 - Signal	Relay energised
	1 - Signal	Relay de-energised

### Front panel controls

#### LEDs

- |   |       |          |                                 |
|---|-------|----------|---------------------------------|
| 1 | ① ② ③ | 1 yellow | Relay output channel 1          |
| 2 | √ ⑤   | 2 red    | Wire break monitoring channel 1 |
|   |       | 3 green  | Supply voltage                  |
|   |       | 4 yellow | Relay output channel 2          |
|   |       | 5 red    | Wire break monitoring channel 2 |

#### Switch

- |    |  |                          |
|----|--|--------------------------|
| S1 |  | Operating mode channel 1 |
| S2 |  | Operating mode channel 2 |
| S3 |  | Wire break monitoring    |

### Dimensions





- W 20 mm  
H 105 mm  
D 115 mm



# KSR Contact Protection Relay

## Type KR230-Ex and KR24-Ex



	 <b>KR230-Ex</b>	 <b>KR24-Ex</b>	Technical Data
<b>Power supply</b>			
Supply voltage terminal 14 (+), 15 (-)	207 ... 253 V AC, 45 ... 65 Hz	20 V ... 30 V DC	
Power consumption	≤ 1.3 W	≤ 1.3 W	
Max. safe voltage	253 V AC	125 V DC, 253 V AC	
Ripple		≤ 10%	
Current consumption		≤ 50 mA	
<b>Input</b>			
terminal 1+, 3-, 4+, 6-	intrinsically safe, acc.to DIN EN 60947-5-6 (NAMUR)		
Open-circuit voltage $U_{AO}$	approx. 8 V DC		
Short-circuit current $I_{AK}$	approx. 8 mA		
Switch point $I_S$ within range	1.2 mA ... 2.1 mA		
Switching hysteresis $I_H$	approx. 0.2 mA		
Input pulse length	⊕ 20 ms		
Input pulse interval	⊕ 20 ms		
Wire break monitoring	Break $I \leq 0.1$ mA, Short-circuit $I > 6$ mA		
<b>Maximum ratings acc. to certificate of conformity</b>			
Approval number	<b>PTB 02 ATEX 2073</b>	<b>PTB 02 ATEX 2072</b>	
Ignition protection class, category	 <b>II (1) G D EEx ia IIC</b>	 <b>II (1) G D EEx ia IIC</b>	
Max. voltage $U_o$	10.6 V	10.5 V	
Max. current $I_o$	19.1 mA	13 mA	
Max. power $P_o$	51 mW	34 mW	
<b>Permissible circuit values</b>			
Ignition protection class, category	<b>EEx ia and EEx ib</b>		
Explosion group	IIA	IIB	IIC
Max. external capacitance	72 $\mu$ F	16.2 $\mu$ F	2.32 $\mu$ F
Max. external inductance	780 mH	390 mH	97 mH
<b>Output</b>			
terminal 7, 8, 9, 10, 11, 12	not intrinsically safe, 1 changeover relay (SPDT) volt-free		
Contact rating AC	253 V / 2 A / $\cos \varphi > 0.7$		
Contact rating DC	40 V / 2 A / resistance load		
Mechanical service life	$10^7$ switching cycles		
Energise delay	approx. 20 ms		
De-energise delay	approx. 20 ms		
<b>Transfer characteristics</b>			
Switching frequency	≤ 10 Hz		
<b>Galvanic separation</b>			
Input - Output / Input - Supply	safe galvanic isolation to EN 50020, 375 $V_{PP}$		
Output - Supply	safe isolation to IEC 61140, nominal isolation voltage 253 $V_{eff}$		
Output - Output	basic isolation to DIN EN 50178, nominal isolation voltage 253 $V_{eff}$		
<b>Environmental conditions</b>			
Operating temperature	-20°C ... +60°C		
Protection class	IP 20		
<b>Mechanical data</b>			
Design	Modular terminal housing in Makrolon flammability class to UL94: V - 0		
Mounting	clipping onto 35 mm standard rail or by screws		
Connections	self-opening instrument terminals max. 2.5 mm <sup>2</sup>		
Weight	approx. 150 g		

1011-2

# KSR Contact Protection Relay Type KR230 and KR24



### General Description

KSR contact protection relays type KR230 and KR24 use a control circuit with a protective low voltage acc. to VDE 0100 part 410 and transmit binary signals from a switching element e.g. magnetic float switches (catalogue 1003) and magnetic switches (catalogue 1008 and catalogue 1015).

The AC control circuit is voltage and temperature compensated and thus guarantees a stable switching behaviour. A 2-point control can be set up using the built-in latching contact.

The built-in relays can be used to trigger contactors or other circuitry without the danger of damaging the switching elements (reed contacts) by current peaks.


Inputs, outputs and supply voltage are galvanically isolated from each other in accordance with DIN EN 50178 for a nominal isolation voltage of 253 V AC.

### High Alarm

The output relay is energised when the switch point is reached.

### Low Alarm

The output relay is energised immediately when the supply voltage is connected. It is de-energised when the switch point is reached.

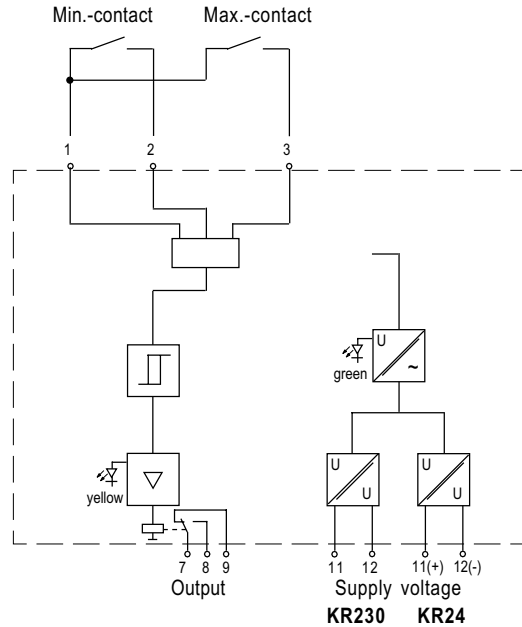

### Technical Details

- control circuit acc. to VDE 0100 part 410
- 2-point control possible
- High / Low Alarm selectable

### Selection of operating mode

Detail front panel	Input	Output
	1 - Signal Terminal 1 Terminal 3	Relay energised
	0 - Signal Terminal 1 Terminal 3	Relay de-energised
	0 - Signal Terminal 1 Terminal 3	Relay energised
	1 - Signal Terminal 1 Terminal 3	Relay de-energised

### Front panel controls

LED's	
1 ① OUT	1 yellow Relay output
2 ② PWR	2 green Supply voltage
S1 I  II	
<b>Switch S1</b>	

**Dimensions**  
W 20 mm  
H 105 mm  
D 115 mm



1011-2

# KSR Contact Protection Relay

## Type KR230 and KR24



		KR230	KR24	Technical Data
<b>Power supply</b>				
Supply voltage	terminal 11(+), 12(-)	230 V AC, 48 Hz ... 62 Hz	24 V DC	
Power consumption		≤ 0.8 W	≤ 0.8 W	
<b>Input / Current circuit</b>		terminal 1, 2 and 3	1 common, 2 min-contact, 3 max-contact	
Max. voltage		10 V AC (approx. 1 Hz)		
Max. current		5 mA		
Min - Max - Control		terminal 1, 2 and 3		
On - Off - Control		terminal 1 and 3		
<b>Output</b>		terminal 7, 8 and 9	1 relay output (SPDT) volt free	
Contact rating AC		250 V / 2 A / $\cos \varphi > 0.7$		
Contact rating DC		40 V / 2 A / resistance load		
Energise delay		approx. 1 s		
De-energise delay		approx. 1 s		
Switch S1		I open circuit current		
		II closed circuit current		
<b>Transfer characteristics</b>				
Switching frequency		≤ 10 Hz		
<b>Galvanic separation</b>				
Supply - Output		safe galvanic isolation		
Supply - Input		acc. to DIN 106		
Input - Output		nominal isolation voltage 253 V <sub>eff</sub>		
<b>Environmental conditions</b>				
Operating temperature		-25°C ... +65°C		
Protection class		IP 20		
<b>Mechanical data</b>				
Design		Modular terminal housing in Makrolon		
		flammability class to UL94: V - 0		
Mounting		clipping onto 35 mm standard rail or by screws		
Connections		self-opening instrument terminals max. 2.5 mm <sup>2</sup>		
Weight		approx. 110 g		



**KSR KUEBLER Niveau-Messtechnik AG**

69439 Zwingenberg  
Germany  
Tel ++49 (0) 62 63 - 87 - 0  
Fax ++49 (0) 62 63 - 87 99

[info@ksr-kuebler.com](mailto:info@ksr-kuebler.com)  
[www.ksr-kuebler.com](http://www.ksr-kuebler.com)