


FKC - Differential Pressure (flow) Transmitter for High Static Pressure

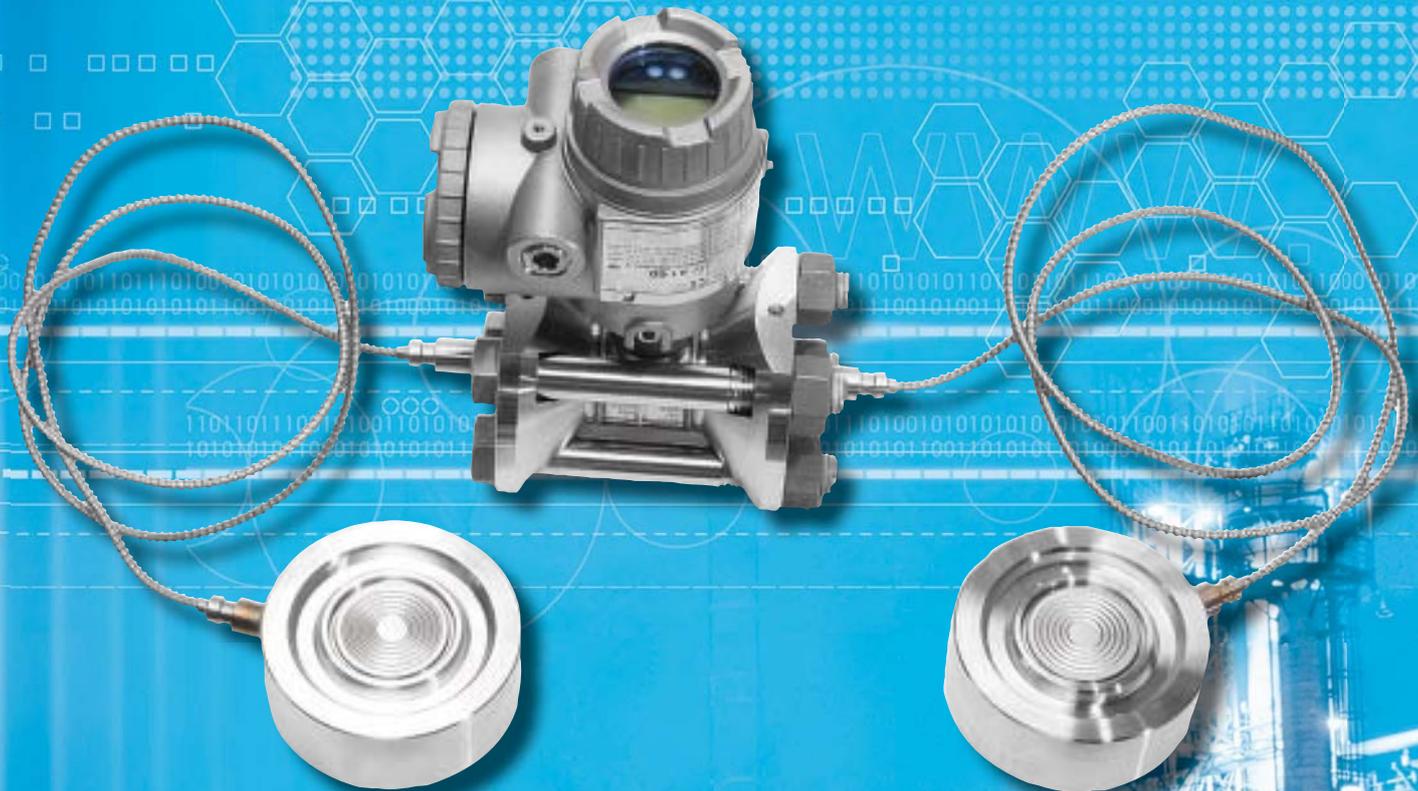

Solutions for specific customer applications :

Based on extensive experience of supplying transmitters for Oil & Gas applications, Fuji Electric France, is proud to announce the release of its latest Differential Pressure as a direct response to our customer's requirement in high pressure applications that are traditionally found in Oil & Gas flow measurement.

The experience and technical capability that we built into the new transmitter enables it to measure differential pressures of 130mbar at static pressures of up to 15 000 Psi (1035 bar), typically found in top side and subsea applications.

Measuring principle :

The transmitter utilizes a unique micromachined capacitive silicon sensor with state of the art microprocessor technology to provide exceptional performance and functionality. The silicon sensor is assembled floating in measuring cell neck, which allows extreme high line pressures and improves the static pressure characteristics.

Robust construction :

The design is based on an all welded construction, where the welded assembling of the process covers on the measuring cell replaces the gaskets. Adapted SS 660 bolting and the specific process covers – NACE compatible – ensure that the required mechanical strength to the assembly is certified according to a PED category IV module H1.

Performance Specifications

Accuracy rating : (including linearity, hysteresis, and repeatability)	For spans greater than 1/10 of URL : $\pm 0.1\%$ of span
Stability	$\pm 0.1\%$ of upper range limit (URL) for 3 years
Ambient temperature effect	Zero : $\pm (0.1 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Total : $\pm (0.125 + 0.025 \times \text{URL} / \text{span})$ in % of URL / 28°C Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Static pressure effect	Zero : $\pm 0.1\%$ of URL / 10 MPa Span : 0 to -0.6 % of span / 10 MPa Double the effects for diaphragm material code "H" (7th digit in codes symbols)
Supply voltage effect	Less than 0.05% of calibrated span per 10V
RFI effect	Less than 0.2% of URL for the frequencies of 20 to 1000MHz and field strength 30 V/m when electronics covers in place. (Classification : 2-abc : 0.2% span per SAMA PMC 33.1)
Mounting position effect	Zero shift : Less than 0.12kPa {1.2m bar} for a 10° tilt in any plane. No effect on span. This error can be corrected by adjusting Zero after installation.
Vibration effect	< $\pm 0,25\%$ of spans for spans greater than 1/10 of URL. Frequency 10 to 150Hz, acceleration 39,2m/sec ²
Dielectric strength	500V AC, 50/60Hz 1 min, between circuit and earth.
Insulation resistance	More than 100MΩ at 500V DC
Turn-on time	4 seconds

Specifications in case of square root output

Accuracy rating	Output 50 to 100% : $\pm 0,1\%$ of span 20 to 50% : $\pm 0,25\%$ of span 10 to 20% : $\pm 0,5\%$ of span
Ambient temperature effect	Shift at 20% output point : $\pm (0,3 + 0,25 \times \text{URL} / \text{span})$ in % of URL / 28°C
Low flow cut-off	Customer configurable for any point between 0 to 20% of output.


Physical Specifications

Process connections	1/4" NPT, autoclave 9/16 - 18 UNF - 2B, others upon request.
Wetted parts materials	Diaphragm SS 316L, Hast.C 276, Others : SS 316L, Hast.C 276, Duplex, Inconel 625
Non wetted parts	Electronics housing : - Low copper die-cast aluminum alloy (standard), finished with epoxy / polyurethane double coating - SS 316 Bolts / nuts : SS 660
Ambient temperature	0 to 85°C
Process temperature	0 to 120 °C
Remote seal designs	To avoid hydrate formation for subsea applications, remote seals can be assembled on the DP transmitter. Possible process connections via remote seals according API, RTJ standards or according customer design.

Code Symbols

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	DESCRIPTION	
F	K	C					4	-		C			-	W	W	Smart, 4-20 mAdc + Fuji/Hart™ digital signal
																Process connection
																Electrical connection
																1/4"-18 NPT
																1/2"-14 NPT
																M 20 x 1,5
																Autoclave 9/16-18 UNF-2B
																M 20 x 1,5 or 1/2"-14 NPT
																Max working pressure (static pressure)
																Test pressure
																690 bar - M20 bolting
																1035 bar (15000 Psi)
																860 bar - M20 bolting
																1290 bar (18710 Psi)
																1035 bar - M20 bolting
																1553 bar (22500 Psi)
																Range
																Min/max range 0 - 130 / 0 - 320 mbar
																Min/max range 0 - 130 / 0 - 1300 mbar
																Min/max range 0 - 500 / 0 - 5000 mbar
																Min/max range 0 - 3000 / 0 - 30000 mbar
																Wetted parts material
																All wetted parts SS 316(L)
																Measuring cell wetted parts in Hast.C 276 - process cover in SS 316L
																Indicator
																No indicator
																Digital indicator, 0-100%
																Digital indicator, Custom scale
																Approvals for hazardous locations (consult FUJI for availability)
																None (standard)
																Flameproof housing ATEX Ex II 2 GD - EEx d IIC T5/T6
																Intrinsic Safety ATEX Ex II 1 GD - EEx ia IIC T4/T5
																FM - Flameproof housing Class I, Division 1, Group B,C,D
																Dust ignitionproof Class II/III, Division 1, Group E,F,G - (elec. conn. code "T" only)
																CSA - Flameproof housing Class I, Group C,D - Class II, Group E,F,G
																Class III - (electrical connection code "T" only)
																FM - Intrinsic safety Class I, II, III, Division 1, Group A,B,C,D,E,F,G
																Nonincentive Class I,II,III, Division 2, Group A,B,C,D,F,G
																CSA - Intrinsic safety & Nonincentive Class I, Group A,B,C,D - Class II, Group E,F,G
																Class III - Temp code T4 for all classes (electrical connection code "T" only)
																Combined ATEX Ex II 2 GD - EEx d IIC T5/T6 & ATEX Ex II 1 GD - EEx ia IIC T4/T5
																Mounting bracket
																Tag plate
																Electronics housing
																Without
																Aluminium
																SS 316L
																Aluminium
																Without
																SS 316
																SS 316L
																SS 316
																Fill fluid
																Specific oil fill for cell
																Specific oil fill for cell. Wetted parts and bolting in conformity with NACE
																- W
																Welded process cover design
																W
																Process cover bolts/nuts in ASTM A 453 grade 660

Outline dimensions

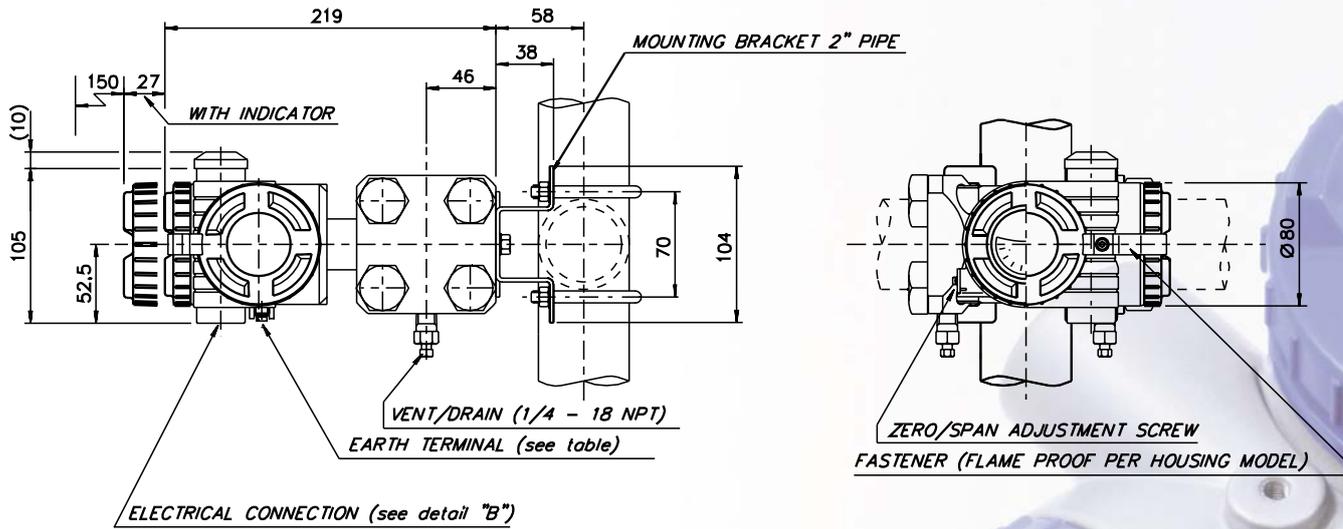

PROCESS CONNECTIONS : 1/4 - 18 NPT (STANDARD)

OR (OPTIONAL)


13/16-16 UN - FOR 9/16 MP AUTOCLAVE CONNECTIONS

9/16-18 UNF - FOR 1/4 HP AUTOCLAVE CONNECTIONS



9/16-18 UNF - FOR 3/8 MP AUTOCLAVE CONNECTIONS

1/2 - 14 NPT

M16 x 1

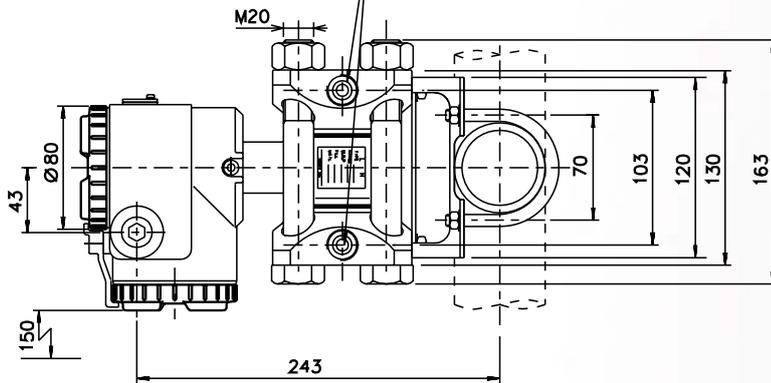

CONNECTION DIAGRAM



SEE TABLE

CONDUIT CONN. D	EARTH TERMINAL		
	E	F	
1/2-14NPT	16	5	N°8 - 32UNC
Pg 13.5	8	4.5	M4
M20x1.5	16	5	M4

Fuji Electric France S.A.S.

46 rue Georges Besse - Z.I du Brézet
63039 Clermont Ferrand cedex 2 - FRANCE

Tel. +33 4 73 98 26 98

Fax +33 4 73 98 26 99

E-mail : sales.dpt@fujielectric.fr

Web : www.fujielectric.fr

Fuji Electric can accept no responsibility for possible errors in catalogues, brochures or other printed material. Fuji Electric reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. All rights reserved.